



Warewashing Extrasmall Glasswasher, Single Skin, 1 cycle, 30b/h

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Warewashing

Extrasmall Glasswasher, Single Skin, 1 cycle, 30b/h

402096 (NGWXS)

Glasswasher (extrasmall),
single skin, 1 cycle, 30b/h

Short Form Specification

Item No. _____

Unit shall be Glasswasher type hot water rinsing for rack dimension from 350*350mm up to 380*380mm. Electrical characteristics to be 23V volts one phase operation with one wash cycle of 120 seconds. Rinse temperature and pressure guaranteed by built in pressure boiler. Washing performance is ensured by a powerful wash pump, revolving washing spray arm. Double skin counter-balance door. 304 stainless steel construction to include door, frame, wash tank, wash arm and rinse arms. The unit is equipped with rinse aid dispenser and electric cable plus Schuko plug.

Main Features

- Built-in pressure boiler sized to raise incoming water to guarantee a minimum rinsing temperature of 82 °C for sanitizing rinse. No external booster is required.
- Washing system endowed with rotating washing arms, high powered wash pump and large capacity wash tank for professional washing.
- Maximum capacity of 30 racks per hour.
- 120 seconds cycle.
- Simple operation control panel.
- Solid double skinned counter-balance stainless steel door with hurt-free handle in plastic.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.
- Easy service access to main components without moving the unit.
- Flexible rack support suitable to use rack dimension from 350x350mm up to 380x380mm.

Construction

- Robust structure thanks to stainless steel construction.
- Requires only 1 phase 230V supply.
- Completely closed on the back by a cover plate.
- Unit to feature rinse aid dispenser pump.
- Internal components (arms and filter) are easy extractable.

Included Accessories

- 1 of Square basket for glasses, 358x380x150mm PNC 867036
- 1 of Insert for 12 saucers, 290x90x75mm PNC 867048
- 1 of Square cutlery container, 89x113x113mm PNC 867049


Optional Accessories

- Square basket for glasses, 350x350x150mm PNC 867034
- Round basket for glasses, 350x160mm PNC 867035
- Round basket for glasses, 380x170mm PNC 867037


APPROVAL: _____

**Warewashing
Extrasmall Glasswasher, Single Skin, 1 cycle, 30b/h**

Front

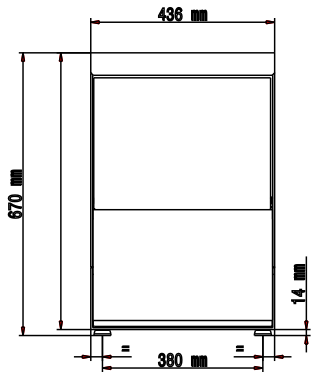


Top

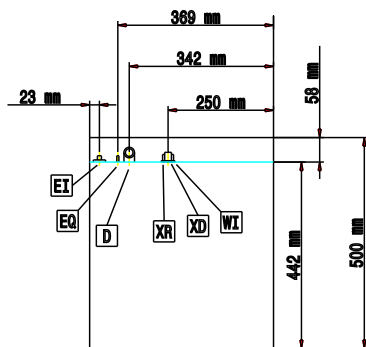

- CW-
I1 = Cold Water inlet 1 **XD** = Detergent connection
D = Drain **XR** = Rinse aid connection
EI = Electrical connection
EO = Electrical Outlet
V = Air vents
WI = Water inlet

Side

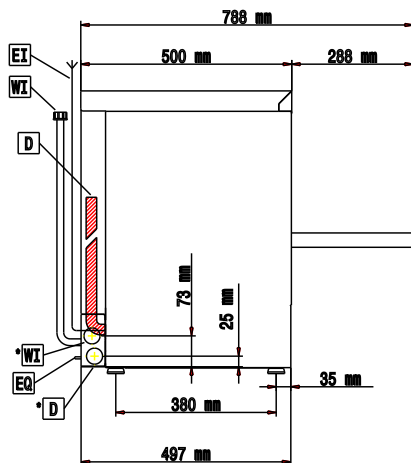

Electric

Supply voltage:	
402096 (NGWXS)	230 V/1N ph/50 Hz
Total Watts:	2.7 kW
Boiler heating elements:	2.5 kW
Tank heating elements:	2 kW
Wash pump size:	0.2 kW

Water:

Pressure, bar min/max:	2-5 bar
Water supply temperature:	10-65 °C
Boiler Capacity (lt):	2.5
Incoming water line size:	3/4"
Washing cycle temperature:	60 °C
Washing tank capacity (lt):	15
Hot rinse cycle temperature:	82 °C
Hot rinse cycle water consumption (lt):	2

Key Information:

Baskets per hour:	30
External dimensions, Height:	670 mm
External dimensions, Width:	436 mm
External dimensions, Depth:	495 mm
Net weight:	33 kg
Shipping weight:	36 kg
Shipping height:	820 mm
Shipping width:	610 mm
Shipping depth:	550 mm
Shipping volume:	0.28 m ³
Noise level:	61 dBA
N° of working cycles - sec.:	1 (120)
Cell dimensions - width:	380 mm
Cell dimensions - depth:	380 mm
Cell dimensions - height:	240 mm