

Warewashing Small Glasswasher, Single Skin, 1 cycle, 30b/h

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Warewashing

Small Glasswasher, Single Skin, 1 cycle, 30b/h

402102 (NGWS)

Glasswasher (small), single skin, 1 cycle, 30b/h

Short Form Specification

Item No. _____

Unit shall be Glasswasher type hot water rinsing for rack dimension of 400*400mm. Electrical characteristics to be 230 single phase operation with one wash cycle of 120 seconds. Rinse temperature and pressure guaranteed by built in pressure boiler. Washing performance is ensured by a powerful wash pump, revolving washing spray arm. Double skinned counter-balance door. 304 stainless steel construction to include door, frame, wash tank, wash arm and rinse arms. The unit is equipped with rinse aid dispenser and electric cable with Schuko plug.

Main Features

- 120 seconds cycle.
- Built-in pressure boiler sized to raise incoming water to guarantee a minimum rinsing temperature of 82 °C for sanitizing rinse. No external booster is required.
- Maximum capacity of 30 racks per hour.
- Simple operation control panel.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.
- Solid double skinned counter-balance stainless steel door with hurt-free handle in plastic.
- Washing system endowed with rotating washing arms, high powered wash pump and large capacity wash tank for professional washing.
- Easy service access to main components without moving the unit.

Construction

- Robust structure thanks to stainless steel construction.
- Requires only 1 phase 230V supply.
- Completely closed on the back by a cover plate.
- Unit to feature rinse aid dispenser pump.
- Internal components (arms and filter) are easy extractable.

Included Accessories


- 1 of Square basket for glasses 400x400x150mm PNC 864470
- 1 of Insert for 12 saucers, 290x90x75mm PNC 867048
- 1 of Square cutlery container, 89x113x113mm PNC 867049

Optional Accessories


- Square basket for glasses, 400x400x1100mm PNC 867039
- Inclination insert for glasses, 400x180mm PNC 867044
- Round basket for glasses, 400x180mm PNC 867047
- Square basket with angles for glasses 400x400x150 PNC 867067
- Inclination for glasses 400x400mm PNC 867069

APPROVAL: _____

Front

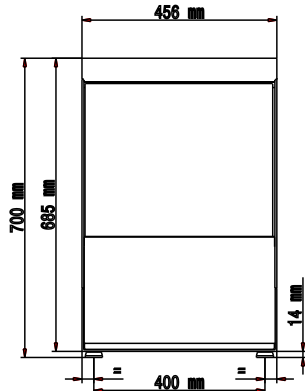


Top

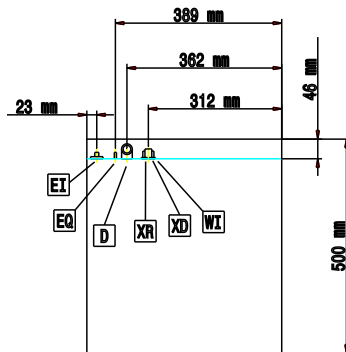

- CW-**
- I1** = Cold Water inlet 1 **XD** = Detergent connection
 - D** = Drain **XR** = Rinse aid connection
 - EI** = Electrical connection
 - EO** = Electrical Outlet
 - V** = Air vents
 - WI** = Water inlet

Side

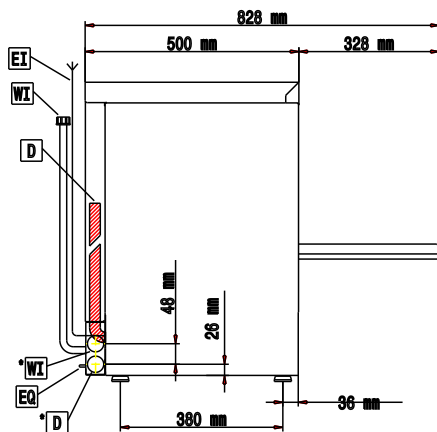

Electric

Supply voltage:	
402102 (NGWS)	230 V/1N ph/50 Hz
Total Watts:	2.7 kW
Boiler heating elements:	2.5 kW
Tank heating elements:	2 kW
Wash pump size:	0.2 kW

Water:

Pressure, bar min/max:	2-5 bar
Water supply temperature:	10-65 °C
Boiler Capacity (lt):	2.5
Incoming water line size:	3/4"
Washing cycle temperature:	60 °C
Washing tank capacity (lt):	16
Hot rinse cycle temperature:	82 °C
Hot rinse cycle water consumption (lt):	2

Key Information:

Baskets per hour:	30
External dimensions, Height:	700 mm
External dimensions, Width:	456 mm
External dimensions, Depth:	495 mm
Net weight:	35 kg
Shipping weight:	40 kg
Shipping height:	850 mm
Shipping width:	620 mm
Shipping depth:	590 mm
Shipping volume:	0.31 m ³
Noise level:	61 dBA
N° of working cycles - sec.:	1 (120)
Cell dimensions - width:	400 mm
Cell dimensions - depth:	400 mm
Cell dimensions - height:	290 mm