



**Warewashing  
Small Glasswasher, single skin  
with drain pump, detergent and  
rinse aid dispensers, UK plug, 30r/h**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



402186 (VGWSGUK)

Glasswasher (small), single skin, with drain pump, Detergent and Rinse Aid Dispensers, 1 cycle, 30b/h - UK Plug, 30r/h

**Short Form Specification**

Item No. \_\_\_\_\_

Unit shall be Glasswasher type hot water rinsing for rack dimension of 400\*400mm. Electrical characteristics to be 230V single phase operation with one wash cycle of 120 seconds. Rinse temperature and pressure guaranteed by built in pressure boiler. Washing performance is ensured by a powerful wash pump, revolving washing spray arm. Double skinned counter-balance door. 304 stainless steel construction to include door, frame, wash tank, wash and rinse arms. The unit shall include drain pump, detergent and rinse aid dispenser pump and be equipped with electric cable with UK plug.

**Main Features**

- Built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82°C for sanitizing rinse. No external boiler is required.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Washing system endowed with rotating washing arms, high powered wash pump and large capacity wash tank for professional washing.
- Maximum capacity of 30 racks per hour.
- 120 seconds cycle.
- Simple operation control panel.
- Built-in rinse aid dispenser with automatic initial and continuous cycle loading for perfect result while minimizing service and maintenance needs.
- Solid double skinned counter-balance stainless steel door with hurt-free handle in plastic.

**Construction**

- Completely closed on the back by a cover plate.
- Robust structure thanks to stainless steel construction.
- Requires only 1 phase 230V supply.
- Internal components (arms and filter) are easy extractable.
- Unit to include detergent and rinse aid dispenser pumps.
- Equipped with single phase electrical cable and 13 amp UK plug for easy and fast installation.

**Included Accessories**

- 1 of Square basket for glasses 400x400x150mm PNC 864470
- 1 of Insert for 12 saucers, 290X90x75mm PNC 867048
- 1 of Square cutlery container, 89x113x113mm PNC 867049


**Optional Accessories**

- Square basket for glasses, 400x400x1100mm PNC 867039
- Round basket for glasses, 400x180mm PNC 867047
- Square basket with angles for glasses 400x400x150 PNC 867067
- Inclination insert for glasses 400x400 mm PNC 867069


APPROVAL: \_\_\_\_\_

**Warewashing  
Small Glasswasher, single skin with drain pump, detergent and  
rinse aid dispensers, UK plug, 30r/h**

**Front**

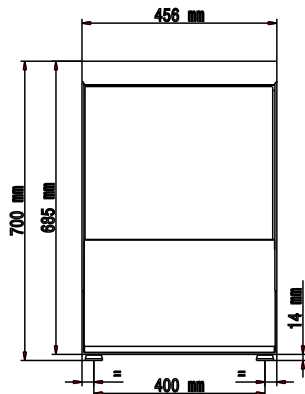


**Top**

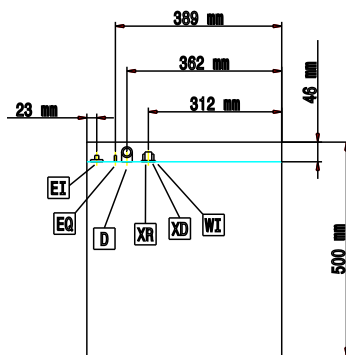

- CW-**
- I1** = Cold Water inlet 1                      **XD** = Detergent connection
  - D** = Drain    **XR** = Rinse aid connection
  - EI** = Electrical inlet (power)
  - EO** = Electrical Outlet
  - V** = Air vents
  - WI** = Water inlet

**Side**

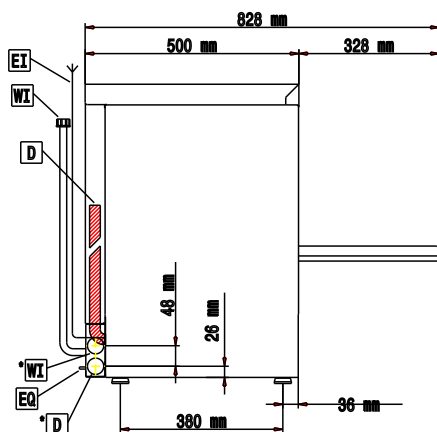

**Electric**

Supply voltage:	
402186 (VGWSGUK)	230 V/1N ph/50 Hz
Total Watts:	2.7 kW
Boiler heating elements:	2.5 kW
Tank heating elements:	2 kW
Wash pump size:	0.2 kW

**Water:**

Pressure, bar min/max:	2-5 bar
Water supply temperature*:	10-65 °C
Boiler Capacity (lt):	2.5
Incoming water line size:	3/4"
Washing cycle temperature:	60 °C
Washing tank capacity (lt):	16
Hot rinse cycle temperature:	82 °C
Hot rinse cycle water consumption (lt):	2

**Key Information:**

Baskets per hour*:	30
N° of working cycles - sec.:	1 (120)
Cell dimensions - width:	400 mm
Cell dimensions - depth:	400 mm
Cell dimensions - height:	290 mm
External dimensions, Height:	700 mm
External dimensions, Width:	456 mm
External dimensions, Depth:	495 mm
Net weight:	35 kg
Shipping weight:	40 kg
Shipping height:	850 mm
Shipping width:	620 mm
Shipping depth:	590 mm
Shipping volume:	0.31 m³
Noise level:	61 dBA