



**Warewashing
Small Double Skin Glasswasher,
drain pump, detergent and rinse aid
dispensers, 30b/h**


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

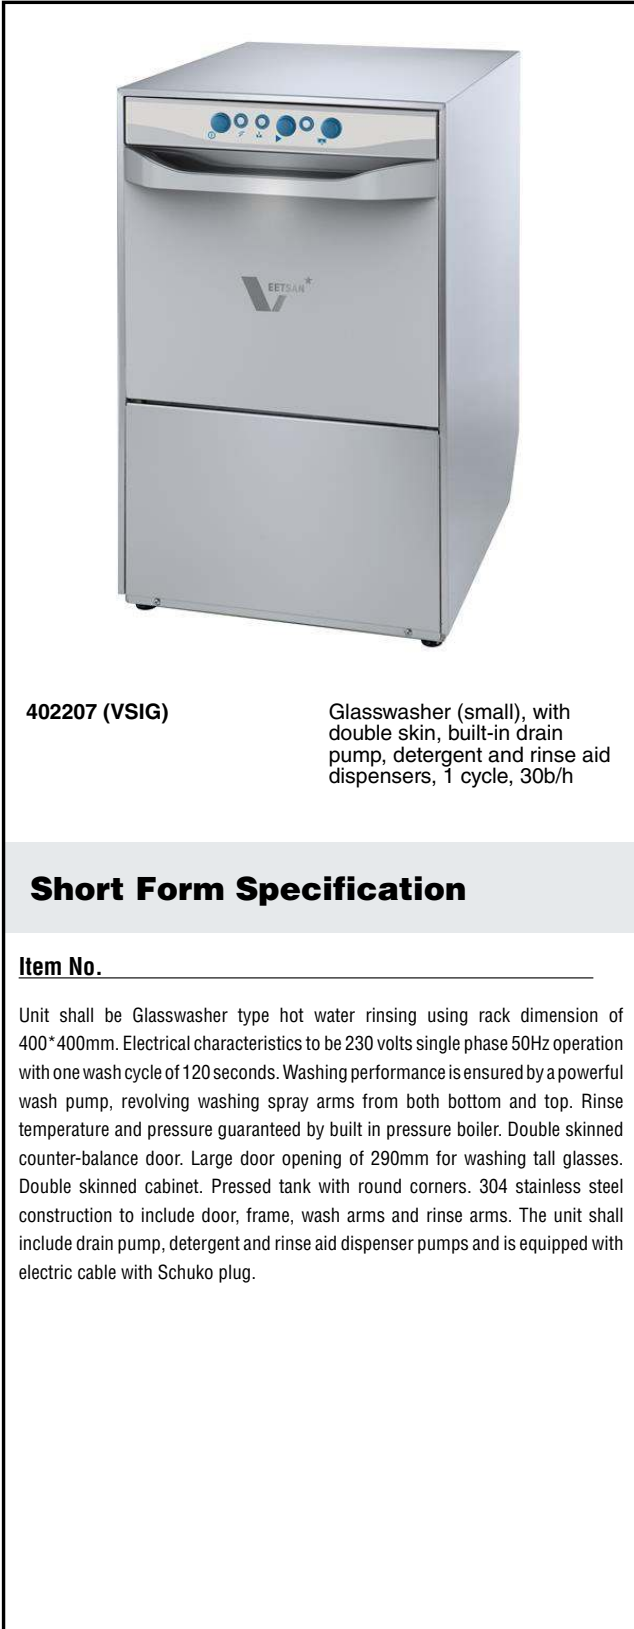

402207 (VSIG)

Glasswasher (small), with double skin, built-in drain pump, detergent and rinse aid dispensers, 1 cycle, 30b/h

Short Form Specification

Item No. _____

Unit shall be Glasswasher type hot water rinsing using rack dimension of 400*400mm. Electrical characteristics to be 230 volts single phase 50Hz operation with one wash cycle of 120 seconds. Washing performance is ensured by a powerful wash pump, revolving washing spray arms from both bottom and top. Rinse temperature and pressure guaranteed by built in pressure boiler. Double skinned counter-balance door. Large door opening of 290mm for washing tall glasses. Double skinned cabinet. Pressed tank with round corners. 304 stainless steel construction to include door, frame, wash arms and rinse arms. The unit shall include drain pump, detergent and rinse aid dispenser pumps and is equipped with electric cable with Schuko plug.

Main Features

- Deep drawn pressed wash tank with fully rounded corners, sloped towards the drain to prevent dirt build up provides fast drainage in only a few minutes. Pressed wash tank with no welded points offer a guaranteed water tight solution.
- 120 seconds cycle.
- Built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82°C for sanitizing rinse. No external boiler is required.
- Maximum capacity of 30 racks per hour.
- Simple operation control panel.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.
- Easy service access to main components without moving the unit.
- Built-in rinse aid and detergent dispenser with automatic initial and continuous cycle loading for perfect result while minimizing service and maintenance needs.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Low noise level.
- Washing system endowed with rotating washing arms from both top and bottom, high powered wash pump and large capacity wash tank guarantee professional washing.
- Optional rinse booster pump available to be installed on site.

Construction

- Completely closed on the back by a cover plate.
- Internal components (arms and filter) are easy extractable.
- Insulated double skin door construction preserves heat inside the tank to lower energy consumption and the noise. Counter-balance mechanism minimizes impact when opening and closing.
- Unit to feature rinse aid and detergent dispenser pumps.
- Wash/rinse arms and nozzles in stainless steel.
- 304 AISI stainless steel front panel, load bearing frame, wash tank, wash and rinse arms.
- Finished in top quality stainless steel with double skinned construction to aid durability and reduce noise.

Included Accessories


- 1 of Square basket for glasses PNC 864470
400x400x150mm

Optional Accessories

- 12lt external manual water softener PNC 860412
- 8lt external automatic water softener PNC 860413
- 20lt external manual water softener PNC 860430
- Stainless steel tank filter PNC 864003
- Filter for partial demineralization PNC 864017
- Kit to measure total and partial water hardness PNC 864050

APPROVAL: _____

- Rinse booster pump kit for single tank pressure dishwasher PNC 864051
- Yellow cutlery container PNC 864242
- Filter for total demineralization PNC 864367
- Pressure reducer for single tank dishwasher PNC 864461
- Kit 4 plastic boxes for cutlery - yellow PNC 865574
- Cover rack for small and light items (500x500 baskets) PNC 867016
- Basket for 16 plates diam.190 mm, 8 plates diam. 240 mm PNC 867052
- Basket for glasses (h 100 mm) PNC 867053
- Basket for glasses (h 200 mm) PNC 867054
- Basket for glasses and saucers/cutlery inserts PNC 867055
- Basket for glasses with angled base PNC 867056
- Round basket kit with square frame PNC 867057
- Insert for "flute" glasses PNC 867058
- Insert for 14 saucers PNC 867060
- Inclined insert for cups PNC 867061
- Insert for 7 plates d. 240mm PNC 867062

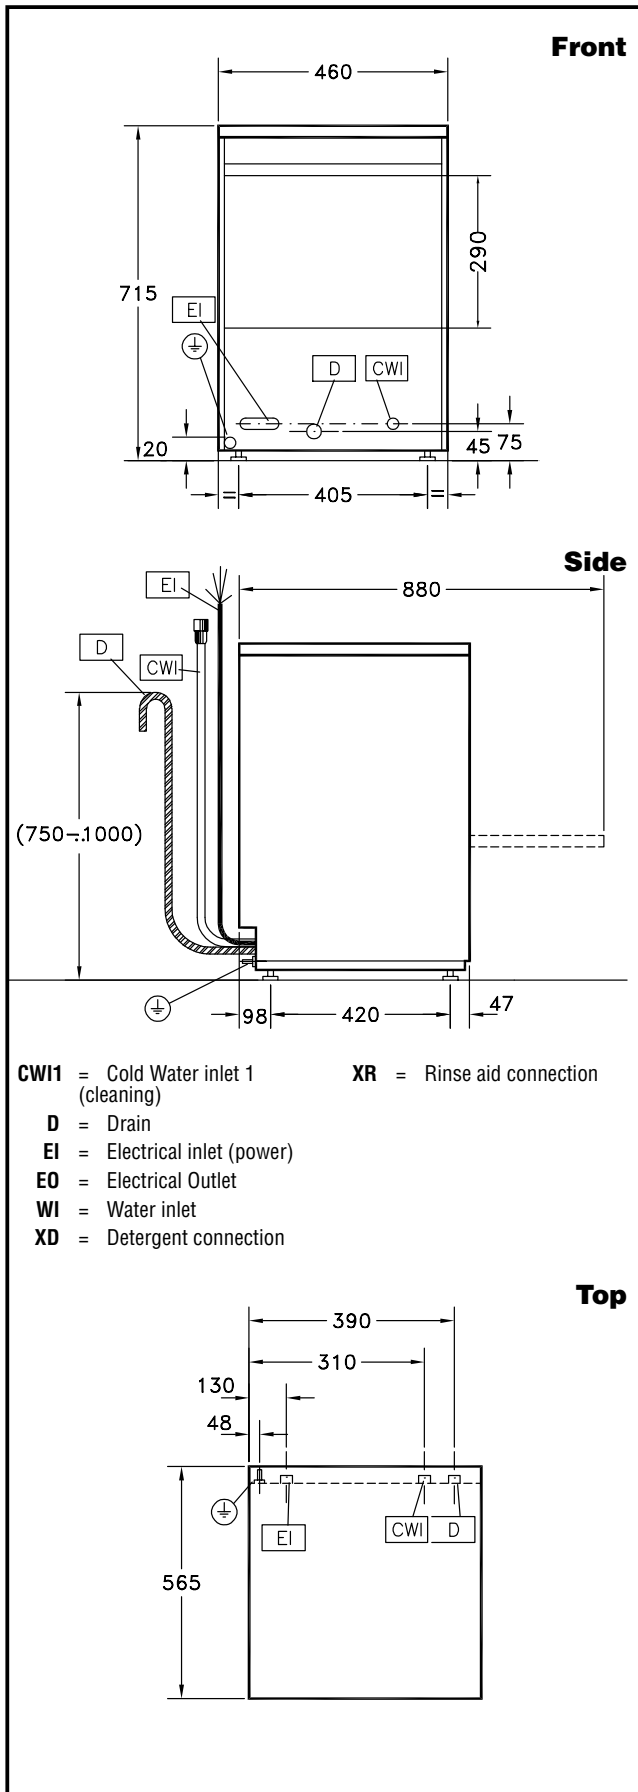

Electric

Supply voltage:	
402207 (VSIG)	230 V/1 ph/50 Hz
Default Installed Power:	2.3 kW
Boiler heating elements:	2 kW
Tank heating elements:	0.8 kW
Wash pump size:	0.3 kW

Water:

Pressure, bar min/max:	1.8-3 bar
Water supply temperature*:	10 °C
Drain line size:	27mm
Washing tank capacity (lt):	6
Water consumption per cycle (lt):	2.3
Boiler Capacity (lt):	5
Incoming water line size:	G 3/4"

Key Information:

Baskets per hour*:	30
Working cycles time (sec.):	120
Wash temperature:	55-65°C
Rinse temperature:	80-90 °C
Cell dimensions - width:	400 mm
Cell dimensions - depth:	400 mm
Cell dimensions - height:	290 mm
External dimensions, Width:	460 mm
External dimensions, Height:	715 mm
External dimensions, Depth:	565 mm
Net weight:	37 kg
Shipping weight:	40 kg
Shipping height:	880 mm
Shipping width:	650 mm
Shipping depth:	520 mm
Shipping volume:	0.3 m ³
Noise level:	67.5 dBA



**Warewashing
Small Double Skin Glasswasher, drain
pump, detergent and rinse aid
dispensers, 30b/h**



**Warewashing
Small Double Skin Glasswasher, drain pump, detergent and rinse aid
dispensers, 30b/h**
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2021.01.18