

Warewashing Small Double Skin Glasswasher, elect, cold rinse, drain pump, det&rinse aid disp,30b/h



402240 (VSICG)

Glasswasher (small), with double skin, electronic control, cold rinse, built-in drain pump, detergent and rinse aid dispensers, 3 cycles, 30b/h

Short Form Specification

Item No.

Unit shall be Glasswasher type hot water rinsing using rack dimension of 400*400mm. Electrical characteristics to be 230 volts single phase 50Hz operation. Washing performance is ensured by a powerful wash pump, revolving washing spray arms both from bottom and top. Rinse temperature and pressure guaranteed by built in pressure boiler. Three automatic cycles of 120/300/120 seconds suitable for glasses and small plates/ saucer. Third cycle having cold rinse after hot rinse phase provides hygiene glasses and cold enough to handle. Double skin counterbalance door. Large door opening of 290mm for washing tall glasses. Double skin cabinet. Pressed tank with round corners. 304 stainless steel construction to include door, frame, wash tank, tank filter, wash arms and rinse arms.Electronic control with temperature display. The unit shall include drain pump, detergent and rinse aid dispenser pumps and is equipped with electric cable and Schuko plug.

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

Main Features

- Built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82°C for sanitizing rinse. No external boiler is required.
- Maximum capacity of 30 racks per hour.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.
- Easy service access to main components without moving the unit.
- Built-in rinse aid and detergent dispenser with automatic initial and continuous cycle loading for perfect result while minimizing service and maintenance needs.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Incorporated Soft Start feature to offer additional protection to more delicate items.
- · Low noise level.
- Extra program to cold rinse beer and wine glasses providing sanitized glasses, cool enough to handle.
- Washing system endowed with rotating washing arms from both top and bottom, high powered wash pump and large capacity wash tank guarantee professional washing.
- New electronic control panel for easy setup of the working parameters and self diagnosis.
- 120/300/120 seconds cycle, the third cycle includes cold rinse.
- Optional rinse booster pump available to be installed on site.

Construction

- Completely closed on the back by a cover plate.
- Internal components (arms and filter) are easy extractable.
- Insulated double skin door construction preserves heat inside the tank to lower energy consumption and the noise. Counter-balance mechanism minimizes impact when opening and closing.
- Unit to feature rinse aid and detergent dispenser pumps.
- · Wash/rinse arms and nozzles in stainless steel.
- Finished in top quality stainless steel with double skinned construction to aid durability and reduce noise.
- Large tank filter collects the soil to keep the wash water clean for a longer time and have better washing performance.
- Deep drawn pressed wash tank with fully rounded corners, sloped towards the drain to prevent dirt buildup, provides fast drainage in just a few minutes. With no welding points the pressed tank offers a guaranteed water tight solution.
- 304 AISI stainless steel front panel, load bearing frame, wash tank, tank filter, wash and rinse arms.

Included Accessories

1 of Stainless steel tank filter	PNC 864003
1 of Square basket for glasses 400x400x150mm	PNC 864470

PNC 860412

PNC 860413

Optional Accessories

- 12lt external manual water softener
- 8lt external automatic water softener

m


APPROVAL:



 20lt external manual water softener 	PNC	860430 🗅
 Filter for partial demineralization 	PNC	864017 🗅
• Kit to measure total and partial water hardness	PNC	864050 🗅
Rinse booster pump kit for single tank pressure dishwasher	PNC	864051 🗅
 Yellow cutlery container 	PNC	864242 🗅
 Filter for total demineralization 	PNC	864367 🗅
• Pressure reducer for single tank dishwasher	PNC	864461 🗅
Drain pump kit for glasswasher electronic	PNC	864465 🗅
Kit detergent dispenser	PNC	864469 🗅
Kit 4 plastic boxes for cutlery - yellow	PNC	865574 🗅
• Cover rack for small and light items (500x500 baskets)	PNC	867016 🗅
 Insert for 12 saucers, 290X90x75mm 	PNC	867048 🗅
 Basket for 16 plates diam.190 mm, 8 plates diam. 240 mm 	PNC	867052 🗅
 Basket for glasses (h 100 mm) 	PNC	867053 🗅
Basket for glasses (h 200 mm)	PNC	867054 🗅
Basket for glasses and saucers/cutlery inserts	PNC	867055 🗅
Basket for glasses with angled base	PNC	867056 🗅
Round basket kit with square frame	PNC	867057 🗅
Insert for "flute" glasses	PNC	867058 🗅
Insert for 14 saucers	PNC	867060 🗅
Inclined insert for cups	PNC	867061 🗆
Insert for 7 plates d. 240mm	PNC	867062 🗆
The second se		

EETSAN

Warewashing Small Double Skin Glasswasher, elect, cold rinse, drain pump, det&rinse aid disp,30b/h

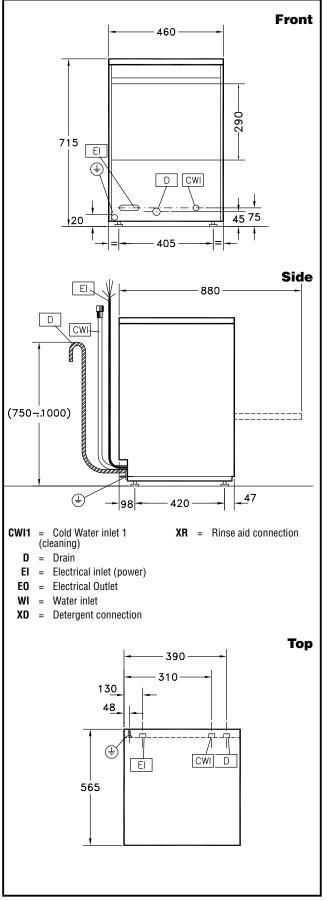

Electric

Supply voltage:	
402240 (VSICG)	200-240 V/1 ph/50 Hz
Default Installed Power:	3.3 kW
Boiler heating elements:	3 kW
Tank heating elements:	0,8 kW
Wash pump size:	0.3 kW
Water:	
Pressure, bar min/max:	1.8-3 bar
Water supply temperature*:	10-55 °C
Drain line size:	22mm
Washing tank capacity (It):	6
Water consumption per cycle (It):	2.3
Boiler Capacity (It):	5
Incoming water line size:	G 3/4"

Key Information:

Baskets per hour*:	30
Working cycles time (sec.):	120/300/120
Wash temperature:	55-65°C
Rinse temperature:	80-90 °C
Cell dimensions - width:	400 mm
Cell dimensions - depth:	400 mm
Cell dimensions - height:	290 mm
External dimensions, Width:	460 mm
External dimensions, Height:	715 mm
External dimensions, Depth:	565 mm
Net weight:	37 kg
Shipping weight:	42 kg
Shipping height:	860 mm
Shipping width:	640 mm
Shipping depth:	520 mm
Shipping volume:	0.29 m ³
Noise level:	69 dBA

Warewashing Small Double Skin Glasswasher, elect, cold rinse, drain pump, det&rinse aid disp,30b/h The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Warewashing Small Double Skin Glasswasher, elect, cold rinse, drain pump, det&rinse aid disp,30b/h



